

Specification

Architecture lighting integration series

LE2711




LE2711






Features



- Applied to the floor , integrated with architecture
- Very thin design, suitable for indoor floor, outline & decorating
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, Make installation more convenient.



Standard Configuration

Picture	Item	Parameter
	Profile	Profile weight : 0.76kg/2.5m Size : L2500*W27*H11mm Material : AL6063-T5 Surface processing : Anodizing
	cover	Type: Frosted diffuser Material : PC Light transmittance : 75% Size : L2500*W18*H3.4mm PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.
	End caps	Size : L27*W11*H7.8mm Material : PC



Optional Accessories

Picture	Item	Parameter
	Flexible strip D8168-24V-10mm	Material :FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 90/>95 ;Voltage :24V ;Power :16.2W/m ;Lumen :1860Lm/m ; Width : 10mm ; Minimum cutting unit : 7LEDs/42mm ;
	End cap with hole	Size : L27*W11*H7.8mm Material : PC


Optical Parameter

(D8168-24V-10mm light source, frosted diffuser)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

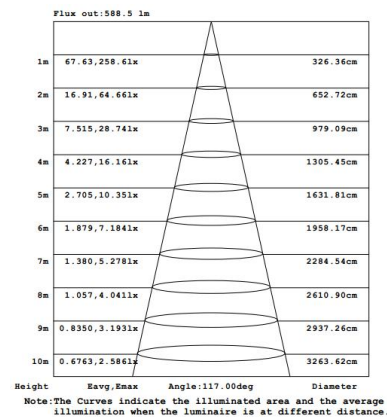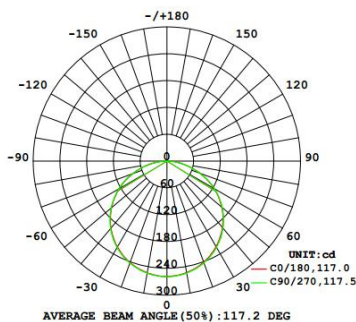

Package

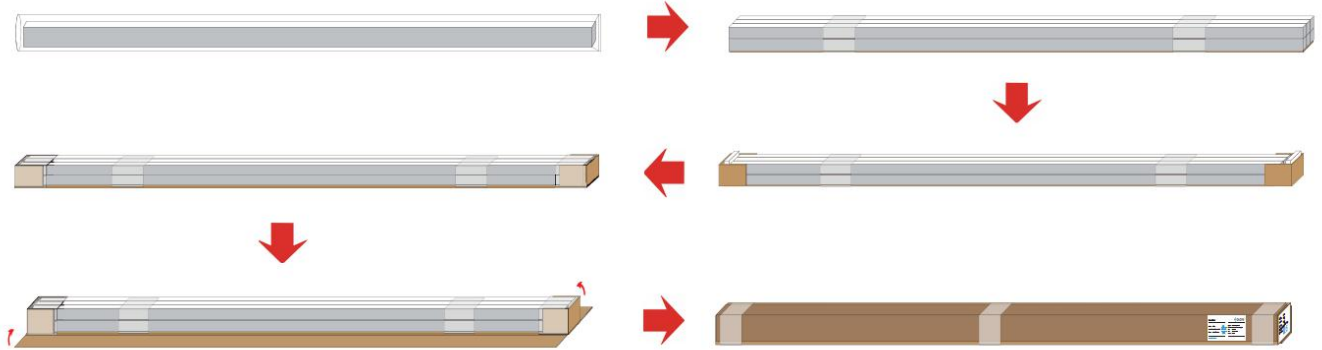

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	21.6	24.6	24pcs/box

